


No Sound Series ISOLA

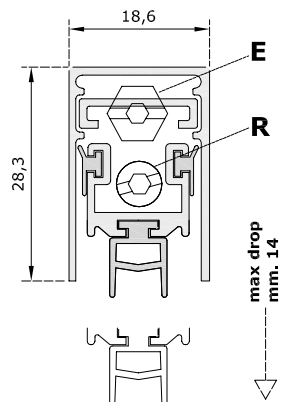

Certified for:

- Sound insulation **40 dB**
- Usage cycles **200.000 cycles**

Protects from:

- Air
- Water
- Light
- Insects


Not an obstacle for disabled persons

STANDARD ACCESSORIES



| | | | | | | | | | | |
|----------------------------|-----|-----|-----|-----|-----|-----|------|------|------|------|
| Standard measurements (mm) | 430 | 530 | 630 | 730 | 830 | 930 | 1030 | 1130 | 1230 | 1330 |
| Max shortening (mm) | 120 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 |

FASTENING SYSTEMS

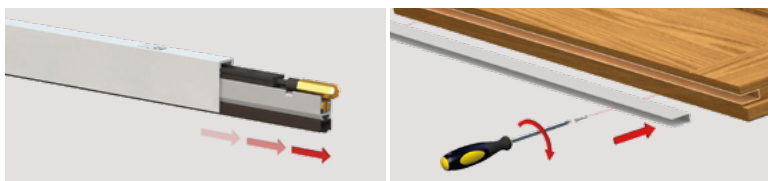


Remove and screw

Mechanism (PATENTED) with the parallel descent of the moving profile with gasket, characterised by the DUAL ADJUSTMENT (screw E: descent - screw R: incline) and by 3 push levers for a strong even pressure on the entire length.

STANDARD: Cardboard box with 24 pcs + 24 standard accessory packs.

MAIN APPLICATIONS

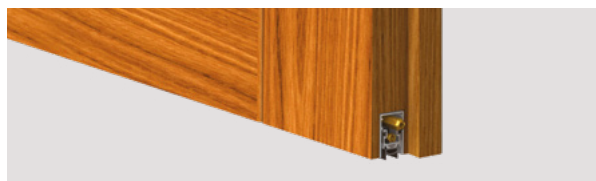

Wood door

Extruded profiles in aluminium alloy 6060 - 3 high performance silicone gaskets - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - 7 mm hexagonal button and Ø 6 mm brass bushing - coil springs in treated stainless steel.

OPTIONAL ACCESSORIES

Details on page 102

1 Nylon plate

CA101 CA102 CA104

100 pcs pack
 brown, white


2 Insulating nylon plate with silicon gasket

PI002 PI002-R

20 pcs pack
 brown, white

Application examples

Smooth frame

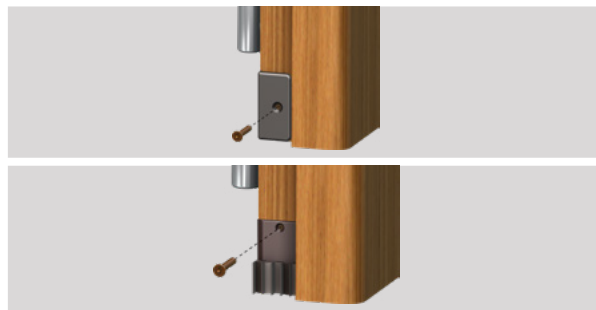

OPTIONAL: Cardboard box with 15 polyethylene bags with 1 pc + 1 standard accessory pack + assembly instructions.