

No Sound Series

1770

XNS


Certified for:

- Sound insulation **54 dB**
- Fire resistance: **60 min.**
- Insulation from smoke **1,50 m³ / h / m - 25 Pa**
- Usage cycles **200.000 cycles**

Protects from:

- Air
- Water
- Light
- Insects

Not an obstacle for disabled persons

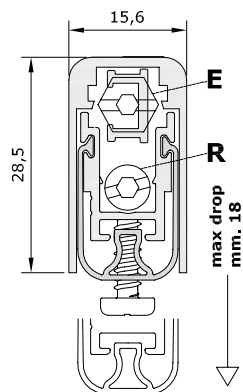

Standard measurements (mm)	530	630	730	830	930	1030	1130	1230	1330
Max shortening (mm)	100	100	100	100	100	100	100	100	100

FASTENING SYSTEMS




With pre-mounted screws

Mechanism (PATENTED) with the parallel descent of the moving profile with gasket, characterised by the DUAL ADJUSTMENT (screw E: descent - screw R: incline) for a strong even pressure on the entire length.

STANDARD: Cardboard box with 32 pcs + 32 standard accessory packs.

MAIN APPLICATIONS

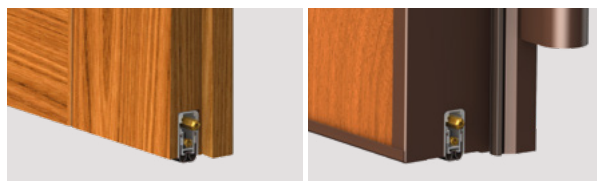

Wood door

Armoured door



Extruded profiles in aluminium alloy 6060 - high performance wrap-around silicone gasket - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - 7 mm hexagonal button and Ø 6 mm brass bushing - coil springs in treated stainless steel - self-drilling 3,5 x 25 mm screws.

OPTIONAL ACCESSORIES

Details on page 102

1 Nylon plate

CA101 CA102 CA104

100 pcs pack
 brown, white

2 Insulating nylon plate with silicon gasket

PI001 PI002 PI002-R

20 pcs pack
 brown, white

Application examples

Smooth frame



BUTTON (E): round nylon, square nylon, bevelled nylon, rolling nylon (pivot).
SCREWS: particleboard 3,5 x 25 mm.

OPTIONAL: Cardboard box with 15 polyethylene bags with 1 pc + 1 standard accessory pack + assembly instructions.